


Konfiguration Barcodescanner

by



Step 1:

Restore EU Factory Configuration

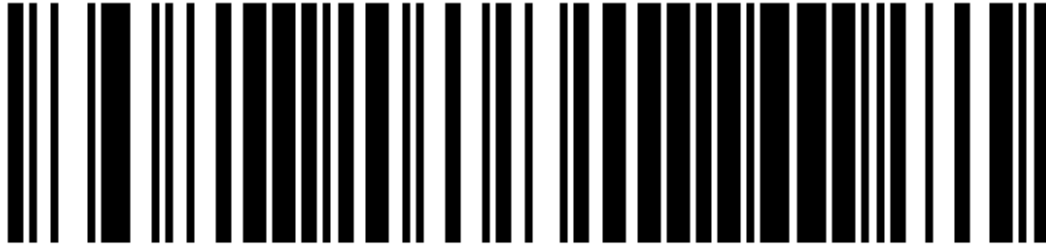

Restore EU Factory Configuration

Step 2:


Enter/Exit Programming Mode



Enter/Exit Programming Mode

Step 3:

Country Mode = German

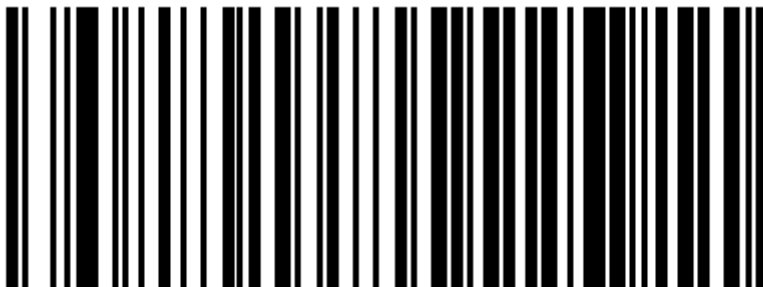

Country Mode = German

Step 4:

Global AIM ID = Enable



Step 5:

Set Global Prefix



Step 6:

1



Step 7:

D



Step 8:

Enter/Exit Programming Mode

